



Slim Duct - Economy Series (Horizontal Only)

ARXG09KLLAP / AOYG09KATA
ARXG12KLLAP / AOYG12KATA
ARXG14KLLAP / AOYG14KATA
ARXG18KLLAP / AOYG18KATA



ARXG09/12/14KLLAP




ARXG18KLLAP



High efficiency and slim design

The slim design allows installations where ceilings are narrow.
Drain hose as standard accessory*



SEER


6.20

(09/18 models)

SCOP

4.30

(09 model)

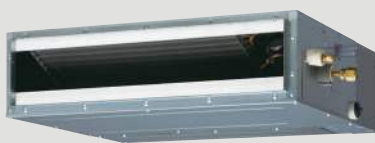

Height
198 mm
Drain pump
built-in

*R32 Model cannot be installed vertically



Selectable with a wide range of static pressure


By using the DC fan motor, it is possible to change the static pressure range from 0 to 90 Pa. The change of static pressure range is possible by remote controller.



Static pressure range
0 to 90 Pa



Low ambient operation

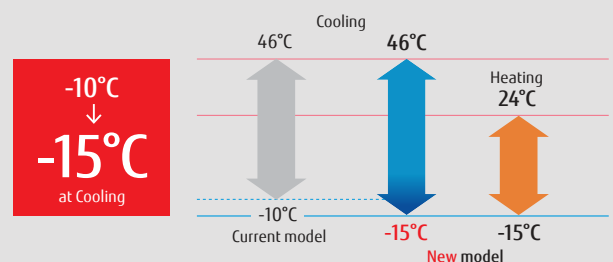

Compact and lightweight outdoor unit

Compact and lightweight outdoor unit expands a wider range of choice for installation location. This makes it easier to use this outdoor unit.

Current model
40 kg



New model
33 kg



Weight
-17.5%

12/14 models

Model: ARXG09KLLAP / ARXG12KLLAP / ARXG14KLLAP / ARXG18KLLAP AOYG09KATA / AOYG12KATA / AOYG14KATA / AOYG18KATA



ARXG09/12/14KLLAP



ARXG18KLLAP



AOYG09/12/14KATA



AOYG18KATA

Optional parts

Wired Remote Controller: UTY-RNRYZ3, UTY-RVNYM,
Simple Remote Controller: UTY-RSRY, UTY-RSNYM


IR Receiver Kit: UTY-LBTYM
Wireless LAN Interface: UTY-TFSXZ1
Remote Sensor Unit: UTY-XSZX

Auto Louver Grille Kit: UTD-GXTA-W (ARXG12/14KLLAP),
UTD-GXTB-W (ARXG18KLLAP)
External Connect Kit: UTY-XWZXZG

Dimensions

Indoor unit :


ARXG09/12/14/18KLLAP

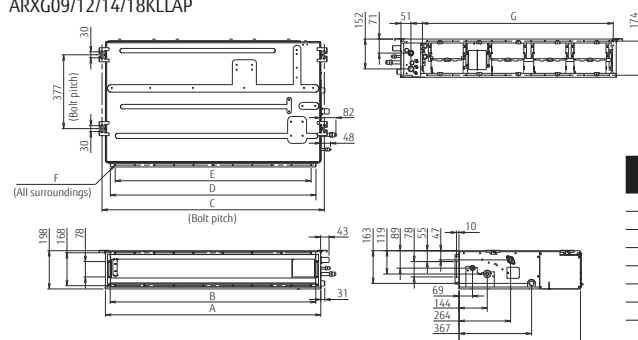


	ARXG09/12/14 KLLAP	ARXG18 KLLAP
A	700	900
B	650	850
C	734	934
D	650	850
E	P100x6~600	P100x8~800
F	18xØ5	22xØ5
G	574	774

Outdoor unit :

AOYG09/12/14KATA

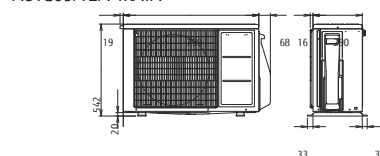

AOYG18KATA

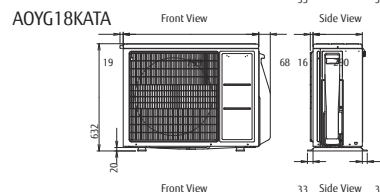

(Unit : mm)

Model No.	Indoor unit		ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP	
	Outdoor unit		AOYG09KATA	AOYG12KATA	AOYG14KATA	AOYG18KATA	
Power Source			Single phase, ~230V, 50Hz				
Capacity	Cooling	kW	2.5(0.9-2.7)	3.5(0.9-3.7)	4.3(0.9-4.5)	5.2(0.9-5.4)	
	Heating		3.2(0.9-3.9)	4.1(0.9-4.4)	5.0(0.9-5.3)	6.0(0.9-6.3)	
UK Total/sensible cooling			2.37 / 1.86	3.27 / 2.49	4.10 / 3.12	4.80 / 3.54	
Input Power	Cooling/Heating		0.69/0.88	1.09/1.17	1.37/1.42	1.66/1.71	
EER	Cooling	W/W	3.62	3.21	3.14	3.13	
COP	Heating		3.64	3.50	3.52	3.51	
Pdesign	Cooling/Heating(-10°C)		2.5/2.3	3.5/2.8	4.3/3.2	5.2/3.8	
SEER	Cooling	W/W	5.9	5.8	5.6	5.8	
SCOP	Heating		3.8	3.8	3.8	3.8	
Energy Efficiency Class	Cooling		A+	A+	A+	A+	
	Heating		A	A	A	A	
Annual Energy Consumption	Cooling	kWh/a	148	211	269	313	
	Heating		847	1,031	1,177	1,398	
Moisture Removal		l/h	0.7	1.3	1.5	2.0	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	28/27/26/25	29/28/26/25	32/30/28/26	32/30/29/27
	Indoor (Heating)	H/M/L/Q		28/26/25/24	29/28/26/24	32/30/28/25	32/30/29/27
Sound Power Level	Outdoor(Cooling/Heating)	High		47/48	49/50	50/51	51/52
	Indoor(Cooling/Heating)	High		57/57	58/58	60/60	58/58
	Outdoor(Cooling/Heating)	High	60/60	62/62	63/63	63/64	
	Indoor / Outdoor (Cooling)	High	600/1,610	650/1,630	800/1,670	940/1,710	
Airflow Rate	Indoor / Outdoor (Heating)	High	600/1,550	650/1,410	800/1,580	940/1,840	
Static pressure range (Standard)		Pa	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)	
Net Dimensions	Indoor	mm	198×700×620	198×700×620	198×700×620	198×900×620	
H x W x D	Outdoor	mm	541×663×290	541×663×290	542×799×290	542×799×290	
Weight	Indoor	kg(lbs)	17(37)	17(37)	17(37)	20(44)	
	Outdoor	kg(lbs)	23(51)	25(55)	32(71)	33(73)	
Remote Controller Type (NOT Supplied With Unit)			NO CONTROLLER SUPPLIED WITH THESE UNITS PLEASE ORDER SEPARATELY				
Interconnecting Cable (Suggested cable size 1.5mm)			3 Core + Earth				
Suggested MCB Size		Amp	10	10	13	13	
Max. Operating Current		A	6.9/6.9	7.7/7.7	9.2/9.2	10.1/10.1	
Power Supply To			Outdoor				
Connection Pipe Diameter (Gas / Liquid)		Inch	3/8 & 1/4	3/8 & 1/4	3/8 & 1/4	1/2 & 1/4	
Max Pipe Length (Pre-Charge)		m	15 (15)	15 (15)	20 (15)	20 (15)	
Max Height Difference			15	15	15	15	
Refrigerant	Type		R32	R32	R32	R32	
	Charge	g	600	700	850	900	
	Additional Charge	g/m	-	-	20	20	
Operation Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	

•Specifications and design are subject to change without notice for further improvement.
•Actual products' colours may be different from the colours shown in this printed material.

Distributed by :



ISO 9001
Certified number: 01 100 075229
Fujitsu General (Thailand) Co., Ltd.



ISO 9001
Certified number: 1591102007385M
Fujitsu General Central Air-conditioner(Wuxi) Co., Ltd.

FUJITSU GENERAL AIR CONDITIONING (UK) LTD

Unit 150 Centennial Park, Centennial Avenue, Elstree, Herts. WD6 3SG

www.fujitsu-general.com/uk

Tel: +44 (0)208 731 3450 Fax: +44 (0)208 731 3451

Copyright© 2018 Fujitsu General Limited. All rights reserved. 3EFNP31-1812E